Jameco Part number 152258

Installation Instructions

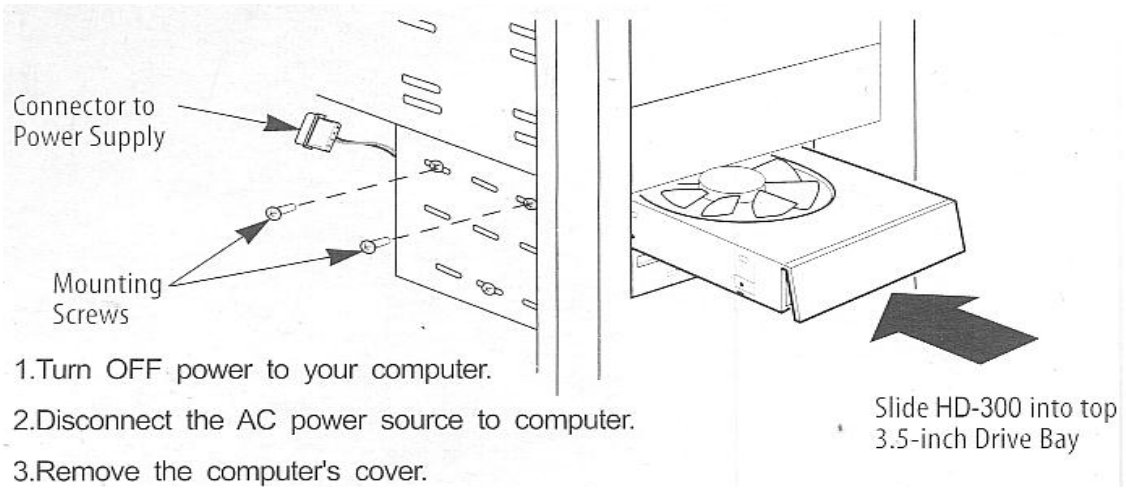

4. Remove the face plate of the top 3.5-inch drive bay to install the HD-300 (install the HD-300above the 3.5-inch floppy disk for best results.)

5. Pull the 4-pin power connector through the drive bay as you slide the HD-300 into the drive bay.

6. Align the mounting holes with the drive bay chassis and secure with the included mounting screws.

7. Connect a 4-pin connector from the computer's power supply to the HD-300's 2-in-1 power connector. (If you are short on power supply connectors, you can also connect another drive's power connector to it.)

8. Replace the computer cover and plug in the computer's AC power source.

9. Turn computer ON. The HD-300 will immediately work to provide cool ventilation.

Feature & Benefits

- For use in PC case with one available 3.5-inch drive bay
- Exhausts heat generated by hard disks and floppy drives to maintain cool air circulation for more reliable drive operation
- High performance and low noise

Specifications
Type: AXial fan
MTBF: 20,000Hours
Air Flow: 32 CFM(cubic-foot/min.)
Speed: 2800RPM
Noise: 26dBA
Voltage: 12V DC ±0.5V
Power: 1.8W
Current: 150mA(max.)
Dimensions: 137mmx101mmx26mm

Made in Taiwan
Manufactured and Exported By ORBITRON